

Wireless Interconnection Function

After install the battery, please press and hold Test/Hush button to make sure the alarm is working in normal condition. Then configure the alarms into wireless interconnected group by the following instruction:

1. Enter Group Mode

Enter group mode by pressing and releasing the Test/Hush button 5 times within 5s. The sounder will emit a short beep and the red LED will flash every 0.5s.

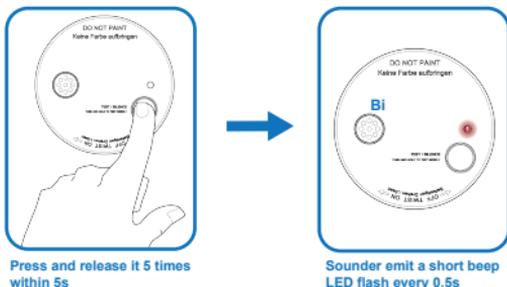


Fig. 1 Enter Group Mode

2. Add a Unit to the Group

To add a unit to the group, press and release the Test/Hush button on the second unit twice within 2s. The sounder will emit a short beep and the red LED will flash every 0.5s to confirm connection to the group (see Fig. 2).

Repeat to add additional units to the group.

NOTE: Group configuration must be completed within 50s, after which time all units will return to the normal condition.

If group configuration is not successful or not finished, repeat from Step 1.

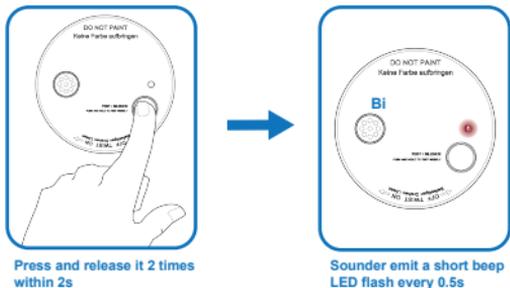


Fig. 2 Add a Unit to the Group

3. End the Group Mode

When all units are added to the group, press and release the Test/Hush button on the first unit to end the group configuration mode.

4. Remove a Unit from the Group

To remove a unit from the group, press and release the Test/Hush button 8 times within 5s. The sounder will emit two short beeps and the red LED will flash twice to confirm removal from the group (see Fig. 3).

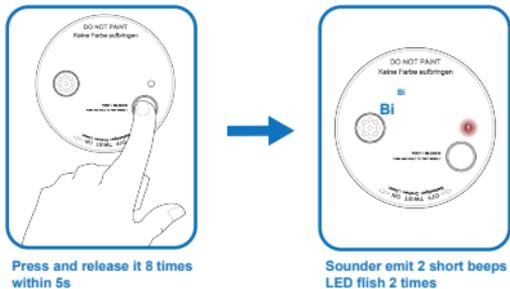


Fig. 3 Remove a Unit from the Group